


VACUFLEX® K1H-L PU MHR

Lightweight and highly flexible hose made of polyether polyurethane

- Applications** exhaust gas extraction, automation technology & robotics, automotive engineering, ventilation, dental technology
- Structure** TPU / Polyether-Polyurethane, black / jet black (similar RAL 9005), opaque, steel wire / spring steel wire / coated / PU
- Temperature** -40°C up to 90°C, short term up to 125°C
- Properties** Leichter, hochflexibler Schlauch mit sehr guten mechanischen Festigkeiten, hohen Zugfestigkeiten bei großer Bruchdehnung, abriebfest und halogenfrei.

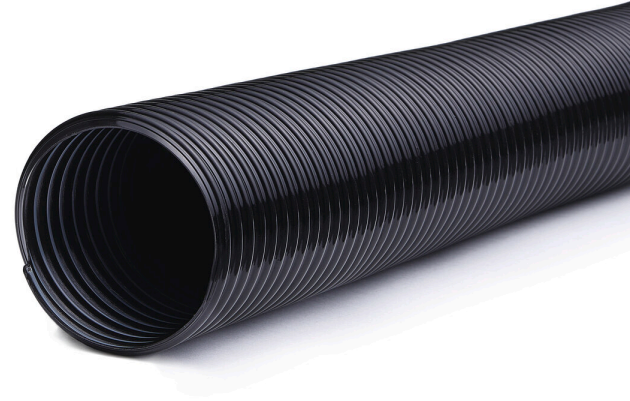

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Vacuum Max. (bar)	Weight (kg/m)	Article Number
32	37,00	0,40	16	0,14	0,18000	4-3606-032-00/999
38	43,00	0,40	20	0,13	0,21650	4-3606-038-00/999
51	56,00	0,40	26	0,11	0,29000	4-3606-051-00/999
60	65,00	0,40	30	0,09	0,34000	4-3606-060-00/999
76	81,00	0,40	38	0,09	0,43500	4-3606-076-00/999
80	85,00	0,40	40	0,07	0,45500	4-3606-080-00/999
90	95,00	0,40	45	0,06	0,42950	4-3606-090-00/999
102	105,00	0,40	50	0,05	0,58000	4-3606-102-00/999