


VACUFLEX® VSM-POOL

Smooth-bore, solid plastic hose with very low flow resistance

Applications	swimming pool technology, vacuum cleaner, pond technology, cleaning, pool & whirlpool
Structure	TPO, uncolored, translucent, profile helix / solid profile helix
Temperature	-50°C up to 60°C
Properties	excellent flexibility, corrugated outside, smooth inside, crush-resistant, can be driven over, good resistance to compressed air containing mineral oil, good oil & petrol resistance, good ozone- & UV-resistance, hydrolysis & microbe resistant, rot proof, weather proof

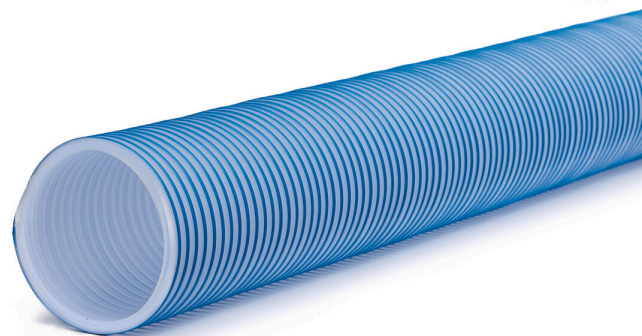

Inner Diameter (mm)	Outer Diameter (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Article Number
32	40,50	80	0,50	0,50	0,21850	4-1100-032-01
38	48,00	95	0,40	0,40	0,25900	4-1100-038-01
50	61,00	120	0,25	0,25	0,33881	4-1100-050-01
51	62,00	122	0,25	0,25	0,34584	4-1100-051-01