VACUFLEX® VSM-HX

Smooth-bore, solid-wall plastic hose with very low flow resistance, made from modified TPO

Applications exhaust gas extraction, extraction systems, air supply, steam extraction, air extraction

Structure TPO, black / jet black (similar RAL 9005), opaque, profile helix / solid profile helix

Temperature -60°C up to 180°C, short term up to 250°C

Properties excellent flexibility, excellent temperature resistance, good low-temperature flexibility, good oil & petrol resistance, good resistance to compressed air containing mineral oil, good ozone- & UV-resistance, rot proof

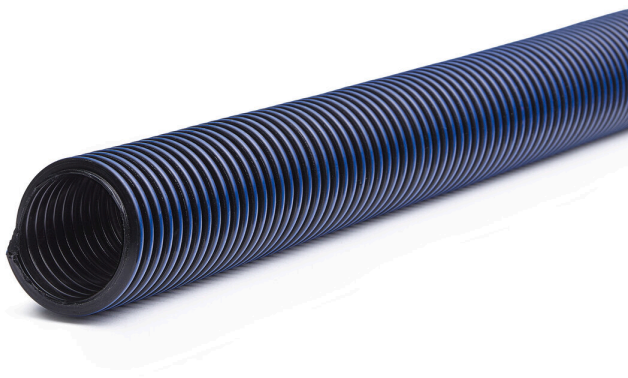





made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Article Number
25	33,00	50	0,60	0,60	0,11000	4-1106-025-HX
32	40,50	70	0,50	0,50	0,27500	4-1106-032-HX
38	48,00	80	0,40	0,40	0,32000	4-1106-038-HX
50	61,00	120	0,25	0,25	0,42000	4-1106-050-HX

Ocono VACUFLEX GmbH | Hessenring 8-12 | 64546 Mörfelden-Walldorf | Germany | T +49 6105 93390 | vacuflex@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 24.11.2026