
SMOOTHFLEXX PRO PU AGRI MHR UV

A lightweight, highly flexible and UV-resistant polyether-polyurethane hose, reinforced with an impact-resistant rigid PVC spiral

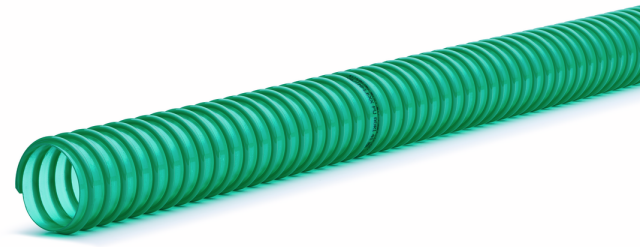

Applications waste water, irrigation, liquid manure spreading, agriculture, air supply

Structure Polyether-Polyurethane, green, translucent, plastic spiral / rigid PVC

Temperature -40°C up to 80°C

Properties good flexibility, good low-temperature flexibility, good abrasion resistance, corrugated outside smooth inside, hydrolysis & microbe resistant rot proof weather proof





made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
40	48,00	0,75	1,80	0,60	9,75	30	9-80B8-040-30/998
43,5	52,00	0,75	1,80	0,60	11,31	30	9-80B8-043-30/998
45	53,80	0,75	1,80	0,50	12,00	30	9-80B8-045-30/998
51	60,70	0,75	1,40	0,40	13,20	30	9-80B8-051-30/998

Ocono VACUFLEX GmbH | Hessenring 8-12 | 64546 Mörfelden-Walldorf | Germany | T +49 6105 93390 | vacuflex@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 04.11.2026