


# SMOOTHFLEXX PU PRO AGRI MHR UV

A lightweight, highly flexible and UV-resistant polyether-polyurethane hose, reinforced with an impact-resistant rigid PVC spiral

|                     |                                                                                                                                                                        |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Applications</b> | waste water, irrigation, liquid manure spreading, agriculture, air supply                                                                                              |
| <b>Structure</b>    | Polyether-Polyurethane, green, translucent, plastic spiral / rigid PVC                                                                                                 |
| <b>Temperature</b>  | -40°C up to 80°C                                                                                                                                                       |
| <b>Properties</b>   | good flexibility, good low-temperature flexibility, good abrasion resistance, corrugated outside smooth inside, hydrolysis & microbe resistant rot proof weather proof |

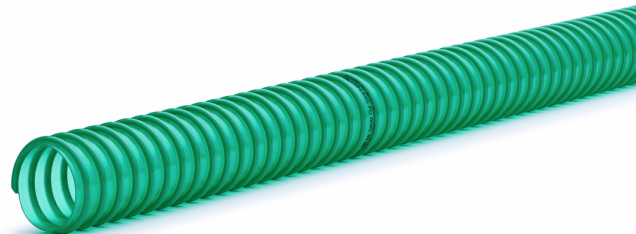

| Inner Diameter (mm) | Outer Diameter (mm) | Wall Thickness (mm) | Max. Operating Pressure (bar) | Vacuum Max. (bar) | Total Weight per Piece (kg) | Length (m) | Article Number    |
|---------------------|---------------------|---------------------|-------------------------------|-------------------|-----------------------------|------------|-------------------|
| 40                  | 48,00               | 0,75                | 1,80                          | 0,60              | 9,75                        | 30         | 9-80B8-040-30/998 |
| 43,5                | 52,00               | 0,75                | 1,80                          | 0,60              | 11,31                       | 30         | 9-80B8-043-30/998 |
| 45                  | 53,80               | 0,75                | 1,80                          | 0,50              | 12,00                       | 30         | 9-80B8-045-30/998 |
| 51                  | 60,70               | 0,75                | 1,40                          | 0,40              | 13,20                       | 30         | 9-80B8-051-30/998 |